



Level Set | **LVT** Stones & Woodgrains

Interface®

Hard meets soft, creating a perfect match

Hard and soft comes together in perfect unity to create a whole new world of inspired floor designs. Our LVT selections of natural and textured wood-grains and creative stones have been thoughtfully designed -- they perfectly integrate, complementing the same natural inspirations seen in our extensive carpet tiles range. No matter how you arrange them, these are designed to mix and flow seamlessly together. In fact, they fit like a glove without the need for transition strips.

Interface LVT is constructed from a combination of highly durable, recyclable layers. Scuffs and scratches from everyday wear are minimized by Ceramor®, a ceramic bead coating that protects the surface layer of the tile. A high performance backing layer, Sound Choice™ acts in the same way as our carpet tiles, reducing noise impact levels and delivering outstanding acoustic properties. And all these are backed by the same 15-year product warranty too.

Get the best of both worlds by pairing LVT with modular carpet tiles, and say hello to harmonious, gorgeous style.





LVT Textured Stones **Colour** Dark Concrete **Installed** Non Directional



LVT Natural Woodgrains **Colour** Winter Grey
Carpet Tile World Woven | WW895 **Colour** Fuchsia Weave **Installed** Ashlar



LVT Textured Woodgrains **Colour** Antique Oak **Installed** Herringbone



LVT Natural Woodgrains **Colour** Bamboo **Installed** Design by Tile



LVT Natural Woodgrains **Colour** Beech **Installed** Ashlar
Carpet Tile Urban Retreat | UR102 **Colour** Granite **Installed** Non Directional



LVT Textured Stones **Colour** Distressed Concrete **Installed** Non Directional



LVT Textured Woodgrains Colour Silver Dune Installed Herringbone



LVT Textured Woodgrains Colour Rustic Oak Installed Ashlar





LVT Textured Stones Colour Light Concrete Installed Non Directional



LVT Textured Woodgrains Colour Grey Dune Installed Ashlar
Carpet Tile Human Connections | Moss Colour Flint/Moss Installed Non Directional



LVT Textured Woodgrains Colour Rustic Hickory Installed Ashlar



LVT Natural Woodgrains Colour Cedar Installed Ashlar
Carpet Tile Urban Retreat | UR102 Colour Flax Installed Non Directional





LVT Textured Stones **Colour** Medium Concrete **Installed** Monolithic
Carpet Tile Visual Code | Hard Drive **Colour** Pewter HD **Installed** Ashlar



LVT Textured Stones **Colour** Emperor Gray
Carpet Tile Human Connection | Stone Course **Colour** Red/Stone
Carpet Tile Human Connection | Rue **Colour** Red **Installed** Non Directional







LVT Natural Woodgrains **Colour** Teak
Carpet Tile Equal Measure | EM552 **Colour** Cobblestone Ave **Installed** Ashlar



LVT Natural Woodgrains **Colour** Sand Dune
Carpet Tile Global Change | Shading **Colour** Morning Mist **Installed** Ashlar



Interface Modular Resilient LVT and Modular Carpet allow you to seamlessly move from hard to soft surfaces. No transition strip needed.

LVT Natural Woodgrains Colour Storm
Carpet Tile World Woven WW895 Colour Heather Weave

Why Our Modular Resilient LVT?

Integrated System.

Say goodbye to transition strips and doubling up. Our modular resilient floorings are made to work as a system with our modular carpet tile. The compatible size and height of our products allows you to integrate modular carpet for an inset rug or an adjacent field – no transition strip required. You'll avoid doubling up on materials and save cost.

Real Flexibility.

Create a unique look that lasts. Interface modular resilient LVT makes it easy to extend the life of your floor. From simple maintenance like damp mopping to selectively replacing damaged tiles, your flooring investment will stand the test of time - beautifully and effortlessly.

Circular System.

Keep flooring out of the landfill. Our modular resilient LVT is produced with a controlled material stream so it can be reclaimed and recycled into our GlasBac™RE recycled content backing through our ReEntry® program.

Noise Reduction.

Less distractions. Interface is helping create **+Positive spaces™** with our LVT with Sound Choice™ backing. It's Quiet Mark™ certified for its superior noise reduction qualities, offering you best-in-class performance for reduced impact sound and floor to floor sound transmission.





High Performance from Top to Bottom.

- 1. *Ceramor® Coating.* Minimizes everyday scratching and scuffing.
- 2. *Wear Layer.* High quality layer enabling 15 years of resilience and performance.
- 3. *Print Film.* Provides outstanding visuals of natural materials and Interface innovative designs.
- 4. *Core Sheet.* Creates a thickness for a stronger core and reduces telegraphing from beneath.
- 5. *Fiberglass.* Adds dimensional stability and controlled flexibility.
- 6. *Core Sheet.* Creates a thickness for a stronger core and reduces telegraphing from beneath.
- 7. *Sound Choice™.* Provides comfort and superior acoustic performance.

Third Party Certification.

Carbon Neutral Floors. All Interface flooring sold globally is third party verified carbon neutral. We've taken a holistic approach to achieve carbon neutrality, first through reducing the carbon footprint of our products and then using carbon offsets for the remainder.

Environmental Product Declaration (EPD). Interface LVT products are covered by an EPD. An EPD provides a comprehensive statement of product ingredients and environmental impacts based upon life cycle assessment performed to ISO standards.

Sustainable Assessment. Interface LVT meets the certification standards of the NSF/ANSI 332 Sustainability Assessment for Resilient Floor Coverings. This standard evaluates the environmental impact of resilient floor covering for its entire lifecycle.

Indoor Air Quality. All Interface modular flooring products meet the highest standards for indoor air quality. Interface LVT is FloorScore® Certified, assuring very low emissions of VOCs.



A003-08
Textured Stones - Light Concrete



A003-11
Textured Stones - Distressed Concrete



A003-09
Textured Stones - Medium Concrete



A003-10
Textured Stones - Dark Concrete




A001-07
Natural Stones - Travertine



A003-02
Textured Stones - Cool Polished Cement



A003-04
Textured Stones - Emperador Gray



A001-04
Natural Stones - Warm Impala Marble



A001-02
Natural Stones - Marone Dark Marble



A001-03
Natural Stones - Cool Impala Marble



Level Set | Woodgrains Colourline



A004-07
Textured Woodgrains - White Wash



A004-27
Textured Woodgrains - Hemlock



A002-08
Natural Woodgrains - Sand Dune



A004-26
Textured Woodgrains - Sugarpine



A004-06
Textured Woodgrains - Antique Light Oak




A002-14
Natural Woodgrains - Bamboo




A004-19
Textured Woodgrains - Antique Ash Oak



A002-12
Natural Woodgrains - Cedar

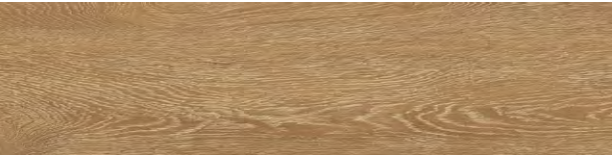

A004-15
Textured Woodgrains - Antique Oak

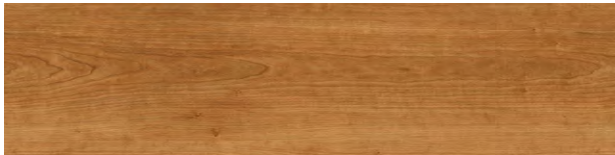

A002-10
Natural Woodgrains - Teak



A002-11
Natural Woodgrains - Washed Maple



A002-04
Natural Woodgrains - Beech




A004-22
Textured Woodgrains - Rustic Hickory



A004-05
Textured Woodgrains - Grey Dune




A004-21
Textured Woodgrains - Rustic Oak

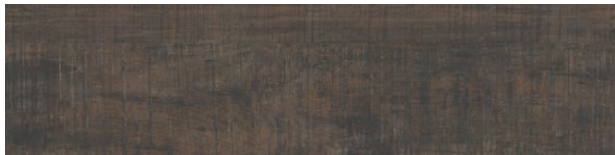


A004-04
Textured Woodgrains - Distressed Black Walnut




A004-20
Textured Woodgrains - Rustic Cashew

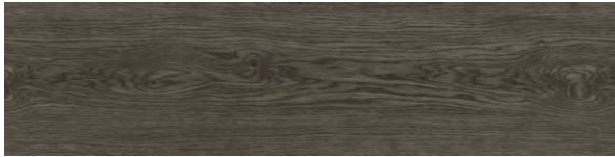


A002-05
Natural Woodgrains - Storm

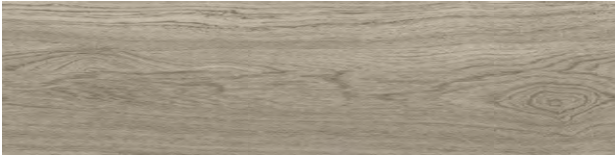

A002-07
Natural Woodgrains - Washed Wheat

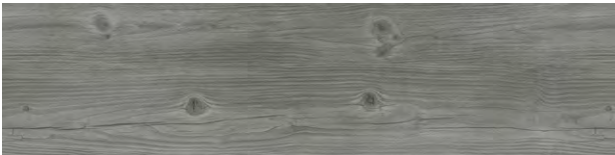

A002-06
Natural Woodgrains - Winter Grey

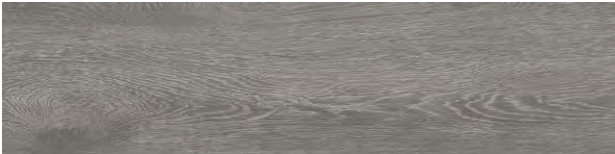

A004-17
Textured Woodgrains - Silver Dune

Specifications

Level Set | Woodgrains

Product Name / Number	Textured Woodgrains - A004 Natural Woodgrains - A002
Product Construction	High Performance Luxury Vinyl Plank
Wear Layer Thickness	0.55 mm
Total Thickness (Metric)	4.5 mm
Classification	EN 651 Class 33 (heavy contract) EN 651 Class 42 (light industrial general)
Acoustic Impact Noise Reduction	ISO 140.8 ΔLw = 16dB
Finish	CERAMOR® UV Stabilized Ceramic Bead Coating
Nominal Dimensions	25cm x 100cm

Performance Specifications


Critical Heat Flux	AS ISO 9239-1	>7kW/m2
Smoke Rate	AS ISO 9239-1	<750%.min
Size, Tolerance	ISO 24342	>400 mm < 0.35 mm
	ISO 24342	<400 mm < 0.25 mm
Dimensional Stability	ISO 23999	<0.25%
Thickness	ISO 24346	Average value + 0.20mm
Resistance to Light	ISO 105-B02	≥6
Resistance to Heat	ASTM F1514	ΔE< 8 avg Max
Resistance to Chemicals	EN-ISO 26987	Pass
Reaction to Fire	EN ISO 13501-1	Class BFI-S1
VOC Test	ISO 10580	Pass
Flexibility	ISO 24344 Method A	Pass
Static Load	ASTM F970	≤0.005" with 1500 psi
Castor chair	ISO 4918	Pass
Thermal Conductivity	EN 12667	0.16 W/mK
Static Electrical	EN 1815	<2kV

Environmental Specifications

Ingredients and Life Cycle Impacts	EPD for LVT
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR
End of Life	Fully Recyclable to carpet tile Backing Recycling

Technical Information

Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	Recyclable through ReEntry®
Warranty	15 Year Standard LVT Product Warranty
Installation Medthod	Ashlar, Herringbone



Production specifications are subject to normal manufacturing tolerances and may be changed without notice. Slight variation in colour among different production lots are normal and should be considered in the overall installation plan. Products covered by manufacturer's written warranty only. All other warranties, including without limitation any implied warranties of merchantability of fitness for particular purpose, are hereby disclaimed. Contact your representative for written warranty information.

Specifications

Level Set | Stones

Product Name / Number	Textured Stones - A003 Natural Stones - A001
Product Construction	High Performance Luxury Vinyl Tile
Wear Layer Thickness	0.55 mm
Total Thickness (Metric)	4.5 mm
Classification	EN 651 Class 33 (heavy contract) EN 651 Class 42 (light industrial general)
Acoustic Impact Noise Reduction	ISO 140.8 ΔLw = 16dB
Finish	CERAMOR® UV Stabilized Ceramic Bead Coating
Nominal Dimensions	50cm x 50cm

Performance Specifications


Critical Heat Flux	AS ISO 9239-1	>7kW/m2
Smoke Rate	AS ISO 9239-1	<750%.min
Size, Tolerance	ISO 24342	>400 mm < 0.35 mm
	ISO 24342	<400 mm < 0.25 mm
Dimensional Stability	ISO 23999	<0.25%
Thickness	ISO 24346	Average value + 0.20mm
Resistance to Light	ISO 105-B02	≥6
Resistance to Heat	ASTM F1514	ΔE< 8 avg Max
Resistance to Chemicals	EN-ISO 26987	Pass
Reaction to Fire	EN ISO 13501-1	Class BFI-S1
VOC Test	ISO 10580	Pass
Flexibility	ISO 24344 Method A	Pass
Static Load	ASTM F970	≤0.005" with 1500 psi
Castor chair	ISO 4918	Pass
Thermal Conductivity	EN 12667	0.16 W/mK
Static Electrical	EN 1815	<2kV

Environmental Specifications

Ingredients and Life Cycle Impacts	EPD for LVT
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR
End of Life	Fully Recyclable to carpet tile Backing Recycling

Technical Information

Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	Recyclable through ReEntry®
Warranty	15 Year Standard LVT Product Warranty
Installation Medthod	Monolithic, Ashlar, Brick, Non Directional, Quarter-Turn



Production specifications are subject to normal manufacturing tolerances and may be changed without notice. Slight variation in colour among different production lots are normal and should be considered in the overall installation plan. Products covered by manufacturer's written warranty only. All other warranties, including without limitation any implied warranties of merchantability of fitness for particular purpose, are hereby disclaimed. Contact your representative for written warranty information.

As part of Interface's Mission Zero promise to eliminate any negative impact on the environment by 2020, we always consider the environment impact of every creative, manufacturing and building decision. This sample book is printed on recycled paper and with soy based ink. Twenty four virgin trees were saved from our use of 1725kg of recycled paper in the production of 5000 sample books. Energy intensity also decreased and greenhouse gases were reduced. The other reductions came from waste water and solid waste. Through our sample reclamation program, we help keep sample materials out of landfill by re-using them until it is time to recycle these sample materials.

www.interface.com

South East Asia

Interface Asia
tel: 65-6478 1510
www.interface.com

South Korea

tel: 82-2-555 1734
www.interface.com

Japan

Interface Japan
tel: 81-3-5733 5211
www.interface.com

India

Interface India
tel: 91 80 30589350
www.interface.com

Beijing Studio

Interface China
tel: 86-10-6590 7810
www.interface.com.cn

Hongkong Studio

Interface China
tel: 852-2802 0838
www.interface.com.cn

Shanghai Studio

Interface China
tel: 86-21-6340 3868
www.interface.com.cn

Australia

Interface Australia
local toll free: 1800 008 101
www.interface.com

08/2019
SF0113T0
AS



Climate change is undeniable. And reversible. Our mission is to prove it. Join the #ClimateTakeBack and help create a climate fit for life.